


4400

OPACITY AND DUST MONITORING

TUV dotCOM APPROVED TO EN 15267

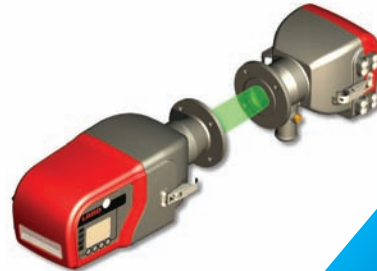

Opacity • Optical Density • Dust Concentration



ETA Process Instrumentation

www.etapii.com
sales@etapii.com
tel 978.532.1330

New England

Martech Controls

www.martechcontrols.com
sales@martechcontrols.com
tel: 315.876.9120

Upstate New York

LAND
AMETEK[®]
PROCESS & ANALYTICAL INSTRUMENTS



QUALITY CUSTOMER SOLUTIONS

4400

AMETEK LAND HAS BEEN MANUFACTURING PRECISION MEASURING EQUIPMENT SINCE 1947.


WE ARE SPECIALISTS IN NON-CONTACT TEMPERATURE MEASUREMENT AND COMBUSTION MONITORING WITH OUR PRODUCTS FINDING APPLICATIONS ACROSS DIVERSE INDUSTRIES SUCH AS STEEL AND GLASS MAKING, POWER GENERATION AND CEMENT MANUFACTURE.

As part of AMETEK Process & Analytical Instruments Division since 2006, our customers benefit from the worldwide AMETEK sales and service team.

THE 4400 IS A ROBUST, ACCURATE AND RELIABLE OPACITY MONITOR FOR MOST TYPICAL EMISSION MONITORING APPLICATIONS.

Combining the unique features of three patented technologies, the 4400 provides a high performance and reliable operation where opacity or dust measurement is required, complying with EN 15267 Part 3.

The 4400 uses patented features to provide unrivalled stability, high levels of accuracy and low detection capability to suit a wide variety of typical combustion applications requiring dust emission monitoring to a high standard.

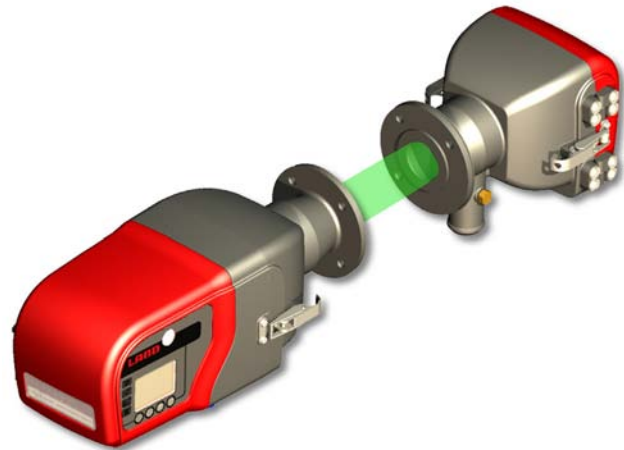

FEATURES ▼

BENEFITS ▼

Long lifetime LED light source	Typical lifetime . 10 years
No continuously moving parts	Highest reliability
Patented all-glass multi-prism retroreflector	Lowest possible drift Patented flood LED ensures thermal stability
Wide operating temperature range	Ambient operation -40 °C to 55 °C (-40 °F to 131 °F) as standard
Green LED light source	As required by international standards

SPECIFICATION & DESIGN

CALIBRATION CHECK

A simple manual calibration check allows the instrument's zero stability to be verified while the process is operating.

CALIBRATION AUDIT

Optional calibration filters can be used to verify linearity and calibration.

NO MOVING PARTS

The 4400 monitor has no moving parts therefore it will give years of trouble-free operation.

USER FRIENDLY

The 4400 provides a simple easy to use menu. The user is guided through the menu with simultaneous text and icon menu prompts. The design eliminates the need to carry an operating manual or laptop to the installation location.

INTELLIGENT COMMUNICATIONS

Modbus RTP, 4-20 mA signals and alarm relays are standard.



STACK DIAMETERS
FROM 0.3 m TO 10 m
(1 ft . TO 33 ft .)



PURGE AIR

- The 4400 requires 60 m³ / hour (36 cfm) of purge air. Consult AMETEK Land for the correct choice of purge air supply.

APPLICATIONS

THE 4400 CAN BE USED TO MEASURE DUST AND OPACITY IN ALL COMBUSTION PROCESSES

- Electricity Generating Units
- Industrial Boilers
- Process Emission Stacks
- Metals Furnaces
- Cement and Lime Kilns
- Dust Collectors

4400

OPACITY MONITORING

SPECIFICATIONS

Measuring Technique:	Double pass transmissometry
Operating Wavelength:	520 ± 20 nm
Light Source :	Pulsed High Intensity LED
Measurement Range:	Opacity 0-10 % to 0-100 % ; Optical Density 0 - 0.1 to 0-3.0 ; Dust Density 0-20 to 0-1000 mg/m ³ (at 5 m pathlength)
Calibration Error:	1.5 % opacity
Thermal Stability:	1.0 % opacity / 22 ° C ambient change
Angle of Projection:	< 3 °
Angle of View:	< 3 °
Response Time:	≤10 s to 95 %
Averaging:	Selectable from 10 s to 24 hr (1 s increment)
Pathlength:	0.5 to 10 m / 20 in to 32 ft (extended)
Control Panel Display:	128 x 64 pixel reflective backlit LCD
Control Panel Keypad:	4 keys for data input
Control Panel Indicators:	Power, System OK, Alarm, Calibration
Operating Temperature:	-40 to 55 ° C / -40 to 131 ° F
Max. Flue Gas Temperature:	600 ° C / 1112 ° F
Max. Flange Temperature:	200 ° C / 392 ° F
Electrical Safety:	IEC / EN 61010-2
EMC:	EN 50 081 & EN50 082
Sealing:	IP65 / NEMA4X
Modbus Interface:	RS485; Opacity, Optical Density, Dust Density and Status information available
Analog Outputs:	Isolated 4 to 20 mA Configurable as Opacity, Optical Density, Dust Density
Relay Outputs:	System OK, Calibration, Alarm
Relay Rating:	1 A @ 24 Vdc
Power Supply:	24 Vdc nominal (18 to 30 Vdc), 0.3 A nominal (3 A start-up)
Transceiver Dimensions (HxWxD):	191 x 291 x 413 mm / 7.5 x 7.9 x 16.3 in
Retro-reflector Dimensions (HxWxD):	101 x 201 x 237 mm / 7.5 x 7.9 x 9.3 in
Transceiver Weight:	6 kg / 13.2 lbs.
Retro-reflector Weight:	3 kg / 6.6 lbs.
Enclosure:	Cast Aluminium, epoxy coated
Approvals:	EN 15267 certified by TUVdotCOM

SEE OUR OTHER PM AND OPACITY RELATED LITERATURE:




4500M kIII
COMPLIANCE
OPACITY MONITOR



4750-PM
PM CEMS
DUST MONITOR

DISCOVER HOW OUR BROAD RANGE OF NON-CONTACT TEMPERATURE MEASUREMENT AND COMBUSTION & EMISSIONS PRODUCTS OFFER A SOLUTION FOR YOUR PROCESS



CONTACT US

ETA Process Instrumentation
www.etapii.com
sales@etapii.com
tel 978.532.1330

New England

Martech Controls
www.martechcontrols.com
sales@martechcontrols.com
tel: 315.876.9120

Upstate New York